

CARBIDE
CUTTER

MICRO CUT

Reducing
Vibration and Noise
during Working


Finishing up
by Carbide Cutter

For deburring focusing
on finishing condition


**FINER BLADE
than CROSS CUT**

Minimizing resistance during cutting for
beautiful smoother finishing

CROSS
CUT



MICRO
CUT



40%

more blades than
cross cut



Applicable
Materials

Ceramics / Glass

Tool Steel /
Alloy Steel

Resin / Rubber

Applicable
Machines

Air Grinder

Drill Press
Electric DrillMachine Tools
Attachment

Carbide / Cermet

General Steels /
Stainless SteelAluminium /
Copper

Bench Grinder

Hand Use

Automatic
Machines


1 Pack

1 Piece

Shank $\varnothing$ 3.0


★BC2503

72,000 r.p.m




BC2501

48,000 r.p.m




BC2502

36,000 r.p.m



★BC2503

24,000 r.p.m



BC2504


1 Pack

1 Piece


Shank $\varnothing$ 3.0

★BC2512

48,000 r.p.m




BC2511



★BC2512

24,000 r.p.m



BC2513


1 Pack

1 Piece


Shank $\varnothing$ 3.0

★BC2522

48,000 r.p.m




BC2521



★BC2522

24,000 r.p.m



BC2523


1 Pack

1 Piece

Shank $\varnothing$ 3.0


★BC2533

72,000 r.p.m




BC2531

48,000 r.p.m




BC2532

36,000 r.p.m



★BC2533

24,000 r.p.m



BC2534



For your own safety, please wear eye protection. Please use SENTAN TOOL® within its maximum rotation speed.

Features

- Reducing cutting resistance and providing less chipping of blade edge.
- Suitable for finishing difficult-to-cut material such as nickel alloy and cobalt alloy.

Recommended MINIMO Handpieces

● Most Suitable ● Suitable

V112H M112H M212H M112 M212 M212L M112G V112 HS M112 HS M112S M212 HD M212D M212 RA M212 RAD M212A M112 GRA M112 GRAD M112 GA RE112 RE212 M212 LRV BS312 US21

1 Pack


1 Piece

Shank $\varnothing$ 3.0




★BC2542

72,000 r.p.m




BC2541

48,000 r.p.m



★BC2542

24,000 r.p.m



BC2543

1 Pack


1 Piece

Shank $\varnothing$ 6.0




★BC5203

30,000 r.p.m




BC5201




BC5202

20,000 r.p.m



★BC5203



BC5204

1 Pack


1 Piece

Shank $\varnothing$ 6.0




★BC5213

30,000 r.p.m




BC5211




BC5212

20,000 r.p.m



★BC5213



BC5214

1 Pack


1 Piece

Shank $\varnothing$ 6.0




★BC5223


30,000 r.p.m




BC5221



BC5222



★BC5223




BC5224

New Release of Carbide Cutter for Finishing!

Suitable for deburring / finishing high hardness material avoiding cutting too much

Characteristics

\\ CLOSE-UP /




Can be used on most metals less than HRC 68 and suitable for high hardness metals such as nickel alloy and cobalt alloy. Very smooth finishing can be expected by high cutting capacity.

Deburring



Available for deburring by machine mounted

Smooth to edge / surface with less cutting resistance

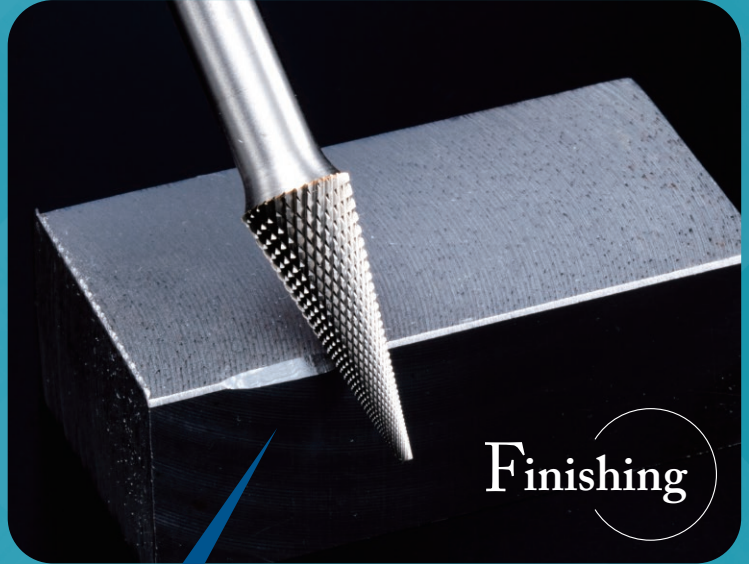

Finishing

Beautiful finishing seems not carbide cutter

Example for use

- Deburring requiring precision
- Fine cutting and repairing
- Repairing metal mold

Recommended Item

Safety Glasses

Standard Type [WG-07]



- Lens hood
- Adjustable nose pad
- Metal parts free, light protective glasses
- UV protection lens

Without Glasses

Safety Glasses

Over-the-Glasses Type [WG-08]



- Wraparound
- Adjustable temple
- Anti-scratch & anti-fog
- UV protection lens

With / Without Glasses

ミニト株式会社

Head Office 3-21-1, Ryogoku, Sumida-ku, Tokyo
Osaka br 2-4-2, Shinmachi, Nishi-ku, Osaka
Nagoya br 1-9-15, Kanayama, Naka-ku, Nagoya
Kyushu br 48-3, Umemitsumachi, Kurume, Fukuoka

<https://www.minitor.co.jp>

TEL.03-6630-5800 FAX.03-6630-5795
TEL.06-6531-5300 FAX.06-6531-5417
TEL.052-331-5222 FAX.052-331-5223
TEL.06-6531-5300 FAX.06-6531-5417

MINITOR CO., LTD. JAPAN

21-1 Ryogoku 3-chome, Sumida-ku, Tokyo 130-0026 JAPAN
Phone.03 (6630) 5800 FAX.03 (6630) 5795

● Contact